FOTON AUMARK


| Model Code | | BJ1128 |
|---|---|---|
| Engine | Model | Cummins ISF3.8s 3168 |
| | Displacement (L) | 3.764 cylinder |
| | Туре | Common Rail Turbocharged with Intercooler |
| | Max power (Hp/rpm) | 170 HP |
| | Max torque (NM/rpm) | 550 NM |
| Gearbox | Model | ZF6S558 |
| | Туре | Cabel Shift Manual |
| | No. of Gears | 6F1R |
| Complete vehicle dimension parameters | Wheelbase (mm) | 4700 |
| | Cab width(mm) | 2060 |
| | Overall Dimensions (L × W × H) (mm) | 8220×2310×2470 |
| Brake | System | Full Air Dual Circuit, with air dryer |
| | | and auto brake lining adjustment |
| | ABS | Standard |
| | Туре | Front - Disc |
| | | Rear - Drum |
| | Auxiliary brake | Exhaust Brake |
| Tyre | Model | 9 R22.5-14 Ply Tubeless |
| | Quantity | 6+1 |
| Suspension | Front suspension/leaf spring number | Multi Leaf spring - 9 Numbers |
| | Rear suspension/leaf spring number | Multi Leaf spring with Helper - 8+6 Numbers |
| Axle | Front Axle Capacity (Kg) | 3600 |
| | Rear Axle Capacity (Kg) | 8000 |
| | Rear Axle Ratio | 5.286 |
| Weight | GVW (Kg) | 12000 |
| | Tare Weight (Kg) | 3600 |
| Cab | Туре | Day |
| | Air conditioning | Standard |
| Fuel tank | Capacity and material | 200L- Aluminum |
| Battery | Battery voltage | 24V |
| Features | 1. Cruise Control for Better Driver Comfort | |
| | 2. Manual Control & Windows/Door; | |
| | | |

Mobimotors

Mobimotors Kenya Penzi Park-Syokimau Mombasa Road-Nairobi +254716666111 Mobimotors Tanzania Plot No 1829 Mandela Road-Dar es Salaam +255747926267

+254716666111 +255747926267 info@mobi-motors.co.ke info@mobi-motors.co.tz Mobimotors Uganda Warehouse 15B Plot No 750 Namanve Industrial-Kampala +256789661772

info@mobi-motors.co.ug

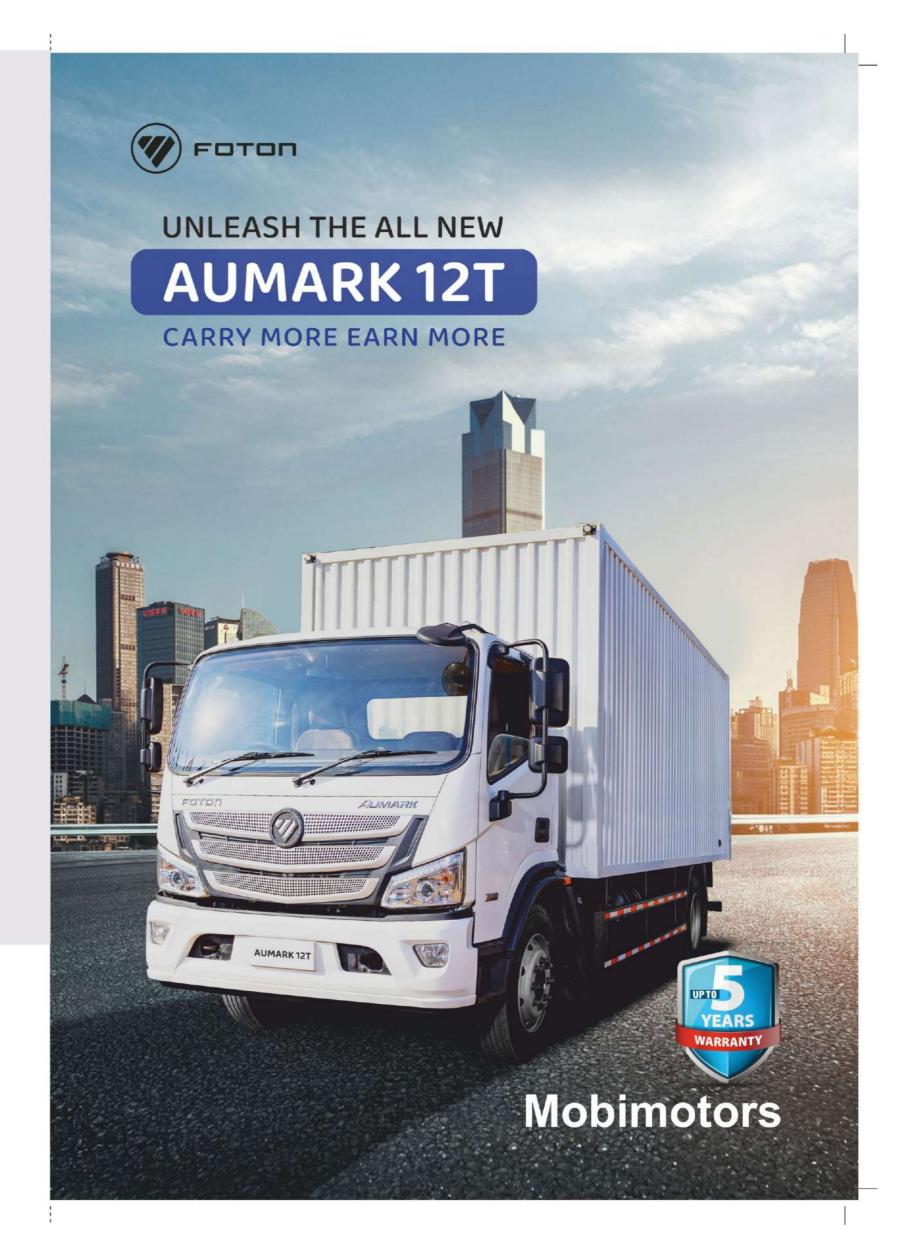


Foton Aumark

Redefining Excellence in Every Aspect

HIGHER EFFICIENCY

Powered by the reliable Cummins ISF3.8L Engine that generates 550 Nm torque, the AUMARK-S features a ZF 6-Speed Manual Transmission. Experience unbeatable fuel economy, exceptional reliability, and significant cost savings.

With a reduced tare weight and a big cargo body that enhances the loading capacity by 10%, the AUMARK-S let you carry more and maximize your earnings like never before!



HIGHER LOADING CAPACITY

Conquer any load with the Foton Aumark. Bigger tires, robust chassis, and heavy-duty suspension deliver improved stability, durability, and effortless handling for maximum performance.







HIGHER SAFETY

Built for Resilience: The Aumark's cabin, engineered to surpass the demanding ECE-R29 standard, provides unparalleled driver safety and peace of mind.

Aumark is equipped with 50,000 CD electric adjustable headlamps and bright LED DRLs improve your night vision and make you more visible to other drivers, enhancing your overall safety.

Complete Air Brakes deliver superior braking efficiency, ensuring reliable performance, excellent stopping distance, and guaranteeing the safety of both you and your valuable cargo.

Standard ABS and EBD systems deliver superior braking efficiency, ensuring reliable performance and excellent stopping distance in all conditions, giving you the confidence to drive safely even when facing unexpected road hazards.



HIGHER RELIABILITY

The Super Powertrain of Cummins engine coupled with ZF gearbox delivers unmatched reliability with a B10 life of 1 million kilometers, robust performance, superior fuel efficiency, and smooth power transmission.

This durable driveline is built to conquer any challenge.

Tested to Endurance: Tested rigorously over 3 million kilometers in the harshest conditions, the Foton Aumark emerges as an undisputed champion of reliability.



HIGHER COMFORT





Wide & spacious cabin, coupled with ergonomic seats and an HVAC system, comfortably accommodates up to three passengers.



The cabin meets European NVH standards (ECE R51), ensuring long rides are peaceful and comfortable.

HIGHER VERSATILITY

The Foton Aumark offers exceptional versatility for diverse applications, thanks to customizable chassis, powerful driveline, spacious cargo capacity, and durable design.



